



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01301031.9

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 12/03/01
LA HAYE, LE

This Page Blank (uspto)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.:
Demande n°: 01301031.9

Anmeldetag:
Date of filing: 06/02/01
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Paging in cellular telecommunications systems

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

NOT AVAILABLE COPY

PAGING IN CELLULAR TELECOMMUNICATIONS SYSTEMS

- 5 The present invention relates to paging in cellular telecommunications systems. Whilst the invention has general application to all types of system, the invention has particular application to the GSM system.

In this specification, the following abbreviations and terminology are used:

10

BS	Base Station
BSC	Base Switching Centre
BSS	Base Station Sub System
BTS	Base Transmitter Station
15 CS	Circuit Switched
GPRS	General Packet Radio System
LA	Location Area
LAC	Location Area Code
MS	Mobile Station
20 MSC	Mobile Switching Centre
PCH	Paging Channel
RA	Routing Area
RAC	Routing Area Code
SGSN	Serving GPRS Support Node
25 VLR	Visitor Location Register

- In GSM, as shown in **Figure 1**, a mobile switching centre MSC with associated VLR controls a plurality of Base Station Subsystems BSS 1-4 through the A interface. Each BSS controls a plurality of base stations BSNa-BSNn, each BS having an associated cell, in which may be
30 located a number of mobile stations (not shown). The totality of cells served by the MSC is partitioned into several Location Areas LA1 LA2, etc. Each LA is served by the BSS responsible for the cells in the LA, but the cells belonging to an LA are not necessarily coincident with the cells belonging to a BSS, see, for example, LA1 which is served by

In mobility management, the location of an MS is updated in the VLR when it moves from one LA to another. The VLR maintains the information for each MS in a group of LAs.

- 5 In GSM networks services, such as speech, are provided on a CS basis in which a channel or timeslot is exclusively allocated to that service. In order to set up a call from the network to a mobile station MS, a call termination procedure is carried out in which the VLR is firstly consulted as to the position of the MS, and the MS is then paged. Paging is performed by paging commands from the MSC to the BSS via the A interface, and via the radio interface
10 over a paging channel (PCH) from the BSS to the MS. Paging through the A interface is defined, for example, in GSM 08.08., see **Figure 15** and sections 3.1.10 and 3.2.1.19. The CS paging request for an MS in STANDBY mode is addressed to a Location Area (LA), in which the MS was last recorded, and is distributed by the BSS in all cells belonging to this Location Area. Each LA is assigned a unique Location Area Code (LAC) by the operator and
15 subsequently each cell within a LA is configured to have the same LAC.

The GSM system also supports data packet-switching through GPRS, for example, Internet applications. The GSM circuit-switching architecture cannot satisfy the packet-switching nature of GPRS, and GPRS requires its own transport network as shown in **Figure 2**. GPRS
20 has two control entities, firstly a support GPRS node (SGSN) and secondly, a gateway GPRS support node (GGSN) which interworks with exterior networks. The SGSN has various G interfaces with the other control entities. In particular, it has a Gs interface with the MSC/VLR, and a Gb interface with the BSS.

- 25 In GPRS networks the CS paging procedure outlined above applies in Network Operation Mode (NOM) II and III for an MS in GPRS STANDBY mode. However, in NOM I, the CS paging request has to be sent from the VLR to the SGSN through the Gs interface by a BSSAP+_PAGING_REQUEST message. Subsequently, the SGSN sends a CS paging request, comprising a PAGING_CS PDU to the BSS through the Gb interface. In this case,
30 the CS paging request is addressed to a Routing Area (RA), which is a subset of one, and only one, LA. There may be any number, between 1 and a large number, of Routing Areas within a Location Area LA.

Only cells supporting GPRS services are configured within a RA. In a similar fashion to the LA configuration, a RA is assigned a unique Routing Area Code (RAC) by the operator and subsequently each cell within a RA is configured to have the same RAC. Cells that do not support GPRS services (non-GPRS cells) are configured only on a LA basis, while those supporting GPRS services (GPRS cells) are configured on both a LA and a RA basis. It is up to the operator to specify the number of RAs within a LA. The SGSN maintains all RA information.

In case an MS moves from a cell within a RA into a cell that belongs to another Routing Area, it will perform a Routing Area Update procedure towards the SGSN, hence the SGSN will get informed of the MS's new location, and modify the paging request accordingly. If the new RA belongs to a different LA, the MS will also perform a Location Update procedure towards the VLR, via the SGSN. Should the MS move from a GPRS cell into a non-GPRS cell that belongs to a different LA, it will perform a Location Update procedure towards the VLR, through the A-interface. However, in case the MS moves from a GPRS cell into a non-GPRS cell **within the same LA**, it will not initiate a Location Update procedure, hence the network (VLR/SGSN) will have no knowledge of the MS's new location. In this case, should the VLR send a CS paging request to this MS through the SGSN, the SGSN will forward the paging request to the BSS indicating paging in the last reported RA in which the MS was located. Since the MS has moved to a non-GPRS cell, it will not receive the CS paging request from the BSS.

To cater for such a case, the GSM Standards specify that all non-GPRS cells within a LA are grouped by the SGSN into a 'null RA'. Regarding the CS paging procedure at the SGSN, section 5.3 in GSM 09.18 specifies that "if within a Location Area there are cells that do not support GPRS services, the SGSN will group these cells under a 'null RA'. The SGSN will perform the paging procedure described above within both the RA(s) derived from the location information and the 'null RA(s)' of the corresponding Location Area(s)". Apart from this statement the Standards have no other references on the null RA issue. The Standards do not specify a procedure to be used by the SGSN in order to indicate to the BSS 'paging in the null RA'. Further, it is not clear in the Standards whether the BSS should page GPRS cells only, or both GPRS and non-GPRS cells within a LA, when it receives a CS paging request from the SGSN indicating paging in the LA.

Summary of the Invention

It is an object of the invention to overcome or at least reduce the above problems.

5

The present invention is based on the realisation that only the BSS have knowledge of all cells served by the BSS, the SGSN only having knowledge of those BSS which serve RAs, from the initial configuration operation. In order for the SGSN to page all possible cells within an associated LA which includes the RA in which the MS was last recorded, the present
10 invention provides a method and means for the SGSN to obtain information about non-GPRS cells within the said LA. This therefore ensures that when the SGSN issues a paging request it can send a paging request to all BSS serving the Location Area in which the current RA is located, which have non-GPRS cells, so that all relevant non-GPRS cells are paged.

15 In a preferred form, the invention provides a table or other record, maintained by the SGSN which lists BSS, and the LAs they serve, which have non-GPRS cells in them. In an alternative form, a central table may be maintained for the network, which all SGSN of the network may access.

20 There are two modes of paging operation in accordance with the invention, when an SGSN is operative in the GPRS mode, and it receives a CS paging request. In a first mode of operation, it issues a paging command to all those BSS serving the LA in which the current RA is located, so that the BSS page all cells within the LA. Whilst this has an advantage of simplicity, it has the disadvantage of paging more cells than is absolutely necessary.

25

In a second mode of operation, the SGSN issues a paging request, with the RA identity attached, to those BSS serving the current RA, so that these BSS can page the RA cells, and also non-GPRS cells (which do not recognise the RA identifier) within the LA area of the RA cell. In addition, the SGSN obtains information, as indicated above, as to any other BSS
30 serving the LA, which have non-GPRS cells. These other BSS are instructed to issue paging requests. By attaching the RA identifier to the command, these other BSS will, since they will not recognise the RA identifier, page only non-GPRS cells.

Further in accordance with the invention, the operator may decide to implement a flag or other switching device per SGSN (configurable by the operator), in order to allow the operator to decide whether the CS paging will be done on a RA or a LA basis. This flag will allow the operator to implement CS paging on a LA basis or on a RA basis for SGSNs interworking with BSSs, that will handle the null RA paging as specified. The flag provides for future optimisation in an operator's network when a Standardised solution is available for the null RA paging.

Thus, in accordance with one aspect of the invention, to solve the null RA issue, the SGSN sends a CS paging request to the BSS indicating paging in the LA, rather than in the RA, as it happens in GSM networks when the CS paging request is sent from the VLR to the BSS through the A-interface. Upon receipt of a CS paging request indicating paging in a LA, the BSS will page all GPRS and non-GPRS cells within the LA, hence the null RA paging would be covered in this case.

However, since the RA concept was introduced to reduce the overhead caused by paging requests within a GPRS network (GPRS networks are expected to generate and handle a fairly bigger amount of paging requests comparing to existing GSM networks), it is desirable to provide an additional means of paging all cells, in accordance with a further aspect of the invention, as follows.

The SGSN has knowledge of the Routing Areas/Location Areas each BSS serves due to the cell status information received at the SGSN from each BSS, during the SGSN-BSS initial configuration. However, since the cell status information is associated only with GPRS cells, the SGSN has no knowledge of any non-GPRS cells supported within a Location Area. Therefore, if a LA spans several BSSs served by the same SGSN, the SGSN has knowledge only of those BSSs that serve GPRS cells belonging to the LA. Hence, in case a BSS serves only non-GPRS cells within a LA, the SGSN will have no information stored in its database about those non-GPRS cells and subsequently no information that the particular BSS serves the LA. In order to overcome this issue, the SGSN obtains information, of the Location Areas that serve non-GPRS cells per BSS, for all BSSs served by the SGSN. This information will be provided by the operator. Each time the SGSN sends a CS paging request to the BSS indicating paging in a RA or a LA, the SGSN will obtain this information to identify the BSSs non-GPRS cells belonging to the Location Area specified in the LAC.

Thus, in accordance with the invention, the SGSN will initiate the following procedures:

In case of CS paging in the LA, the SGSN will send a CS paging request with an LAI IE to all
5 BSSs that serve GPRS, non-GPRS and blocked GPRS cells belonging to the indicated LA. Upon receipt of the CS paging request each BSS will page all cells within that LA including the 'blocked' GPRS cells (if possible) and the non-GPRS cells.

In case of CS paging in the RA, the SGSN will send the following paging requests:

- 10 CS paging request with a RAC that identifies the last reported RA to the BSS(s) that serves the RA indicated. The BSS(s) will page the GPRS cells within the indicated RA and all the non-GPRS cells served by the LA that the RA belongs to (including the 'blocked' GPRS cells – if possible – served by the LA that the RA belongs to).
- 15 CS paging request to all other BSSs which serve non-GPRS cells (including the 'blocked' GPRS cells) within the LA that the RA indicated in the RAC belongs to, but do not serve the RA itself. Those BSSs that receive the CS paging request from the SGSN have no knowledge of the RA specified in the RAC, they only know the LA specified in the LAC. If a BSS receives a paging request with an unknown RAC and a known LAC, it will page only the non-
20 GPRS cells served by the LA indicated (including the 'blocked' GPRS cells – if possible – served by the LA indicated).

The first procedure is a simple solution that i) brings to an end the ambiguity in the Standards on whether the BSS pages only GPRS cells within a Location Area, upon receipt of an LAI IE
25 in the CS paging request from the SGSN and ii) provides an alternative to the operators who require a solution for the null RA paging but prefer their BSSs/SGSNs to perform CS paging in the LA.

In the second procedure of CS paging in RA, the SGSN needs to send only one CS paging
30 request to the BSS that serve the RA indicated in the RAC; no additional CS paging request is sent to those BSS to provide for paging in the null RA. It is up to the BSS to identify and page also the non-GPRS cells and blocked GPRS cells served but the LA that the RA belongs to.

Accordingly, the present invention relates to a cellular telecommunications system comprising:

a plurality of base station control means (BSS) serving cells in a Location Area (LA), which

5 comprises a first plurality of cells,

circuit-switch control means (MSC/VLR) for said Location Area, for establishing circuit-switched connections thereto,

packet control means (SGSN) for establishing data packet-switching with mobile stations within one or more Routing Areas (RA), the or each Routing Area comprising a second

10 plurality of cells, being a subset of the first plurality of cells, and the packet control means (SGSN) being operative to page mobile stations within a Routing Area for initiating a circuit-switched connection to a mobile station.

In a first aspect, the invention provides such a system, wherein the packet control means has
15 means to provide information of base station control means which serve cells within the Location Area which are not part of a Routing Area, and in that the packet control means consults said information when paging mobile stations.

In a second aspect, the invention provides apparatus in such a system, wherein the packet
20 control means has means to provide information of those base station control means which serve cells within the Location Area which are not part of a Routing Area, and in that the packet control means is operative to consult said information when paging mobile stations.

In a third aspect, the invention provides a method of paging in such a system, the method
25 comprising:

said packet control means, in response to a paging request, obtaining information of base station control means which serve cells in said Location Area which are not part of a Routing Area , and

said packet control means instructing base station control means to page selected cells in said
30 Location Area and in particular said cells which are not part of a Routing Area.

Brief Description of the Drawings

Preferred embodiments of the invention will now be described with reference to the accompanying drawings, wherein:-

Figure 1 is a conceptual diagram of a GSM architecture showing Location Areas;

Figure 2 is a conceptual diagram of the GPRS logical architecture, as specified in the GSM standards;

Figure 3 is a schematic diagram of an SGSN incorporating a table for locating non-GPRS cells, according to an embodiment of the invention; and

Figure 4 is a conceptual view an arrangement of cells, some of which are GPRS cells and some of which are not, and an arrangement in accordance with the invention for issuing paging requests to the cells.

Description of the Preferred Embodiments

Referring now to the embodiment shown in **Figure 3** an SGSN is shown including a table stored in memory and shown in more detail on the right hand side of **Figure 3**. As shown, the table has two columns, firstly a list of BSS coupled to the SGSN, and secondly, a column identifying Location Areas for each BSS which have non-GPRS cells. Thus in operation, when the SGSN receives a paging request from the network, it issues a paging command to the BSS coupled to the SGSN through the Gb interface. In addition, it ensures in the paging request that, by accessing the table, all BSS having non-GPRS cells will be instructed to page those cells. The precise manner in which this is effected will now be described with reference to **Figure 4**.

Referring to **Figure 4**, there are two separate modes of operation. In the case of CS paging in the LA, the SGSN will send a CS paging request with an LAI IE to all BSSs that serve GPRS, non-GPRS or blocked GPRS cells belonging to the indicated LA. Upon receipt of the CS paging request each BSS will page all cells within that LA including the 'blocked' GPRS cells (if possible) and the non-GPRS cells.

- As an example, the SGSN has to send a CS paging request to all BSSs that serve LA1. The SGSN already knows from the cell status information received from BSS1 and BSS2 during the SGSN-BSS1 and SGSN-BSS2 initial configurations that there are GPRS cells in BSS1 and BSS2 which belong to LA1 (cells *a*, *b* in BSS1 and cells *e*, *f* in BSS2 – cells *b* and *f* are currently blocked). The SGSN also identifies from the cell status information it holds that BSS1 and BSS2 serve blocked GPRS cells belonging to LA1. Therefore, the SGSN will send a CS paging request to BSS1 and BSS2 with the LAC indicating LA1. Upon receipt of the CS paging request BSS1 will page cells *a*, *b* (if possible) and *c*, while BSS2 will page cells *d*, *e* and *f* (if possible). However, the SGSN has no knowledge that cell *h* also belongs to LA1 since it is a non-GPRS cell and therefore no cell status information about it was sent from BSS3 to the SGSN during the SGSN-BSS3 initial configuration. The only way for the SGSN to get information about this cell is through the table of the Location Areas that serve non-GPRS cells per BSS, provided by the operator.
- 15 The SGSN identifies from the table that BSS1, BSS2 and BSS3 serve non-GPRS cells that belong to LA1. Hence, the SGSN will also send a CS paging request to BSS3 that will page in turn cell *h*.

In the case of CS paging in the RA, the SGSN will send the following paging requests:

- 20 CS paging request with a RAC that identifies the last reported RA to the BSS(s) that serves the RA indicated. The BSS(s) will page the GPRS cells within the indicated RA and all the non-GPRS cells served by the LA that the RA belongs to (including the 'blocked' GPRS cells – if possible – served by the LA that the RA belongs to).
- 25 As an example, the SGSN identifies from the cell status information it holds that RA1 is served by BSS1 and subsequently sends a CS paging request to BSS1 with the RAC, LAC of the RAI IE indicating RA1 and LA1 respectively. BSS1 will page the GPRS cell *a* within RA1 and also page the non-GPRS cell *c* and the blocked GPRS cell *b* (if possible) since they are both served by LA1 that RA1 belongs to. In that way, the SGSN will send only one CS
- 30 paging request to BSS1, it is up to BSS1 to identify and page also the non-GPRS cells (including the blocked GPRS cells) served by LA1 that the RA1 belongs to.

10

Note: In the illustration, RA1 within LA1 is served only by BSS1. However, a RA can span more than one BSSs. In such a case, the mechanism specified in step 1 will be implemented for all BSSs that serve the RA.

- 5 CS paging request to all other BSSs which serve non-GPRS cells (including the 'blocked' GPRS cells) within the LA that the RA indicated in the RAC belongs to, but do not serve the RA itself. Those BSSs that receive the CS paging request from the SGSN have no knowledge of the RA specified in the RAC, they only know the LA specified in the LAC. If a BSS receives a paging request with an unknown RAC and a known LAC, it will page only the non-
- 10 GPRS cells served by the LA indicated (including the 'blocked' GPRS cells – if possible – served by the LA indicated).

The SGSN will look up in the table with the Location Areas that serve non-GPRS cells per BSS, to identify the BSSs that serve LA1.

15

- In addition, the SGSN shall check its database with the cell status information to identify the BSSs that serve blocked GPRS cells belonging to LA1. The SGSN identifies from the table that BSS1, BSS2 and BSS3 serve non-GPRS cells that belong to LA1. The SGSN also identifies from the cell status information it holds that BSS1 and BSS2 serve blocked GPRS
- 20 cells belonging to LA1. In this case, the SGSN will also send a CS paging request to BSS2 and BSS3 with the RAC, LAC indicating RA1 and LA1 respectively. BSS2 and BSS3 have no knowledge of the RA1 that belongs to LA1 (since BSS1 is uniquely associated with the specific RA), but they do know LA1 since they serve cells belonging to this LA. Therefore, BSS2 and BSS3 will page only the non-GPRS cells that belong to LA1 (cell *d* in BSS2 and
- 25 cell *h* in BSS3, including the blocked GPRS cell *f* in BSS2).

Claims

- 5 1. A cellular telecommunications system comprising:
a plurality of base station control means (BSS) serving cells in a Location Area (LA),
which comprises a first plurality of cells,
circuit-switch control means (MSC/VLR) for said Location Area, for establishing
circuit-switched connections to mobile stations within the Location Area,
10 packet control means (SGSN) for establishing data packet-switching with mobile
stations within one or more Routing Areas (RA), the or each Routing Area comprising
a second plurality of cells, being a subset of the first plurality of cells, and the packet
control means (SGSN) being operative to page mobile stations within a Routing Area
for initiating a circuit-switched connection to a mobile station,
15 characterised in that the packet control means has means to provide information of
base station control means which serve cells within the Location Area which are not
part of a Routing Area, and in that the packet control means consults said information
when paging mobile stations.
- 20 2. In a cellular telecommunications system, apparatus comprising:
a plurality of base station control means (BSS) serving cells in a Location Area (LA),
which comprises a first plurality of cells,
circuit-switch control means (MSC/VLR) for said Location Area, for establishing
circuit-switched connections to mobile stations within the Location Area,
25 packet control means (SGSN) for establishing data packet-switching with mobile
stations within one or more Routing Areas (RA), the or each Routing Area comprising
a second plurality of cells, being a subset of the first plurality of cells, and the packet
control means (SGSN) being operative to page mobile stations within a Routing Area
for initiating a circuit-switched connection to a mobile station,
30 characterised in that the packet control means has means to provide information of
those base station control means which serve cells within the Location Area which are
not part of a Routing Area, and in that the packet control means is operative to consult
said information when paging mobile stations.

3. A system or apparatus according to claim 1 or 2, wherein said packet control means is arranged to issue a paging request to said base station control means that cells within said Location Area should be paged.

5

4. A system or apparatus according to claim 3, wherein said packet control means is arranged to issue a paging request including a Location Area Information Identifying Element, so that cells falling within other Location Areas are not paged

- 10 5. A system or apparatus according to claim 1 or 2, wherein said packet control means is arranged to issue a paging request to said plurality of base station means indicating that a said second plurality of cells should be paged corresponding to the Routing Area in which the mobile station was last located, and in addition, said cells which are not part of a Routing Area.

15

6. A system or apparatus according to claim 5, wherein said paging means is arranged to issue a paging request including a Location Area Information Identifying Element and a Routing Area Information Identifying Element, so that cells falling within other Routing Areas are not paged.

20

7. A system or apparatus according to claim 3 or 4 in combination with claim 5 or 6, including switch means for selecting paging in accordance with claim 3 or 4, or paging in accordance with claim 5 or 6.

- 25 8. A system or apparatus according to any preceding claim, wherein the packet control means includes a table means which lists base station control means, and the Location Area or Areas served by such base station control means which include cells not forming part of a Routing Area.

- 30 9. A system or apparatus according to any preceding claim, wherein the packet control means is arranged to page cells which are part of a Routing Area but are blocked from data-packet switching operation, said packet control means being arranged to obtain information on blocked cells from a database of cell status information included in said

13

10. A method of paging in a cellular telecommunications system, the system comprising:

a plurality of base station control means (BSS) serving cells in a Location Area (LA), which comprises a first plurality of cells,

5 circuit-switch control means (MSC/VLR) for said Location Area, for establishing circuit-switched connections to mobile stations therein,

packet control means (SGSN) for establishing data packet-switching with mobile stations within one or more Routing Areas (RA), the or each Routing Area comprising a second plurality of cells, being a subset of the first plurality of cells, and the packet control means
10 (SGSN) being operative to page mobile stations within a Routing Area for initiating a circuit-switched connection to a mobile station,

said paging method being characterised by:

said packet control means, in response to a paging request, obtaining information of base station control means which serve cells in said Location Area which are not part of a
15 Routing Area , and

said packet control means instructing base station control means to page selected cells in said Location Area, and in particular said cells which are not part of a Routing Area.

11. A method according to claim 10, wherein said packet control means issues a paging
20 request to said plurality of base station control means that all cells within said Location Area should be paged.

12. A method according to claim 11, wherein said paging request includes a Location Area Information Identifying Element, so that cells falling within other Location Areas are not
25 paged.

13. A method according to claim 10, wherein said packet control means issues a paging request to said plurality of base station control means indicating that cells in a specific Routing Area should be paged and in addition, said cells not forming part of a Routing
30 Area.

14. A method according to claim 13, wherein said paging request includes a Location Area Information Identifying Element and a Routing Area Information Identifying Element, so
cells falling within other Routing Areas are not paged.

15. A method according to claim 11 or 12, in combination with claim 13 or 14, including preselecting whether the paging is to be in accordance with claim 11 or 12, or in accordance with claim 13 or 14.

5

16. A method according to any of claims 10 to 15, wherein the packet control means includes a table means which lists base station control means, and the Location Area or Areas served by each base station control means which include cells not forming part of a Routing Area.

10

17. A method according to any of claims 10 to 16, said packet control means instructing said base station control means to page cells in a Routing Area which are blocked for operation for data – packet switching.

15 18. A method according to claim 17, said packet control means obtaining information of blocked cells from a database of cell status information held by the packet control means.

19. A method of paging in a cellular telecommunications system, the system comprising:
a plurality of base station control means (BSS) serving cells in a Location Area (LA),
20 which comprises a first plurality of cells,
circuit-switch control means (MSC/VLR) for said Location Area, for establishing circuit-switched connections to mobile stations therein,
packet control means (SGSN) for establishing data packet-switching with mobile stations within one or more Routing Areas (RA), the or each Routing Area comprising a second
25 plurality of cells, being a subset of the first plurality of cells, and the packet control means (SGSN) being operative to page mobile stations within a Routing Area for initiating a circuit-switched connection to a mobile station,
said paging method being characterised by:
said packet control means issuing a paging request to said plurality of base station control
30 means that all cells within said Location Area should be paged.

20. A method of paging in a cellular telecommunications system, the system comprising:
a plurality of base station control means (BSS) serving cells in a Location Area (LA),
which comprises a first plurality of cells,
5 circuit-switch control means (MSC/VLR) for said Location Area, for establishing circuit-switched connections to mobile stations therein,
packet control means (SGSN) for establishing data packet-switching with mobile stations within one or more Routing Areas (RA), the or each Routing Area comprising a second plurality of cells, being a subset of the first plurality of cells, and the packet control means
10 (SGSN) being operative to page mobile stations within a Routing Area for initiating a circuit-switched connection to a mobile station,
said paging method being characterised by:
said packet control means issuing a paging request to the base station control means that serve the Routing Area in which a mobile station was last reported, that the Routing Area
15 should be paged, together with cells not forming part of a Routing Area,
and said packet control means issuing a paging request to all other base station control means which serve cells within the Location Area that do not form part of a Routing Area, that such cells should be paged.
- 20 21. A system, apparatus or method according to any preceding claim, wherein the system is GSM, wherein said circuit-switch control means includes a Mobile Switching Centre and a Visitor Location Register, each said base station control means includes a base station subsystem, and said packet control means includes a serving GPRS support node for GPRS services.

This Page Blank (uspto)

ABSTRACT**PAGING IN CELLULAR TELECOMMUNICATIONS SYSTEMS**

5

In order to ensure that a mobile station is located and paged for a circuit-switched connection in a GSM system which supports data packet switching (GPRS) services, a specific means, a table held by the SGSN, is provided for locating a mobile station in the case where the mobile has moved from the Routing Area in which it was last located to a cell within the same Location Area which does not support GPRS services. The GSM system comprises a plurality of base station controllers (BSS) serving cells in a Location Area (LA), a circuit-switch control (MSC/VLR) for establishing circuit-switched connections to mobile stations within said Location Area, and a packet control (SGSN) for establishing data packet-switching with mobile stations within one or more Routing Areas (RA) within the Location Area. A method of paging includes the packet control, in response to a paging request, consulting information from a table held by the packet control of base station controllers which serve cells in said Location Area which are not part of a Routing Area , and instructing base station controllers to page cells in said Location Area and in particular said cells not forming part of a Routing Area.

10

15

20 [Figure 2]

This Page Blank (uspto)



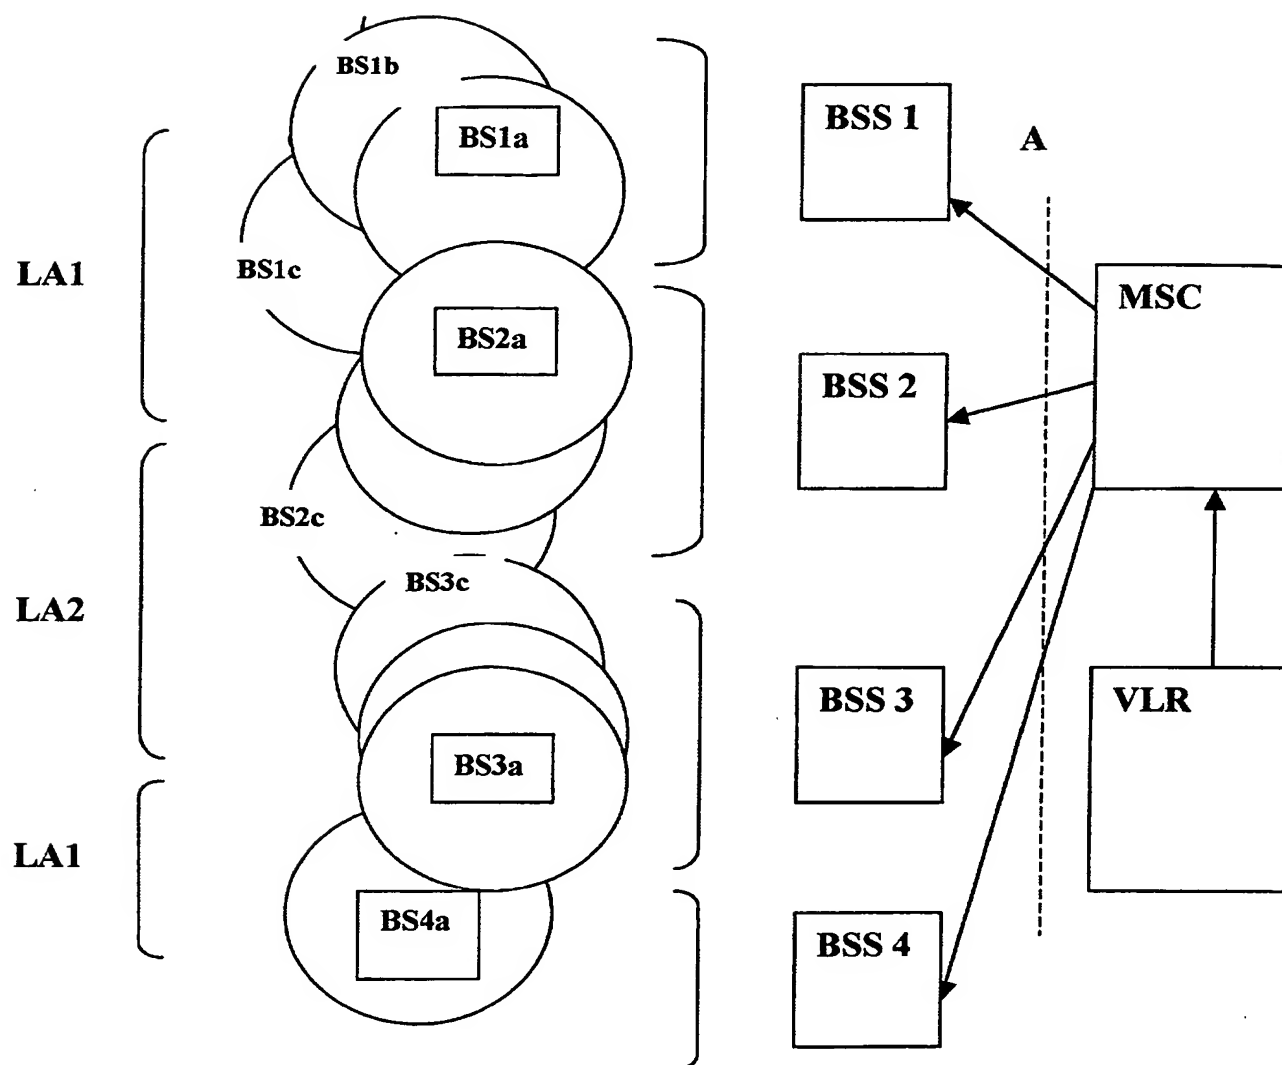


FIGURE 1

2/4

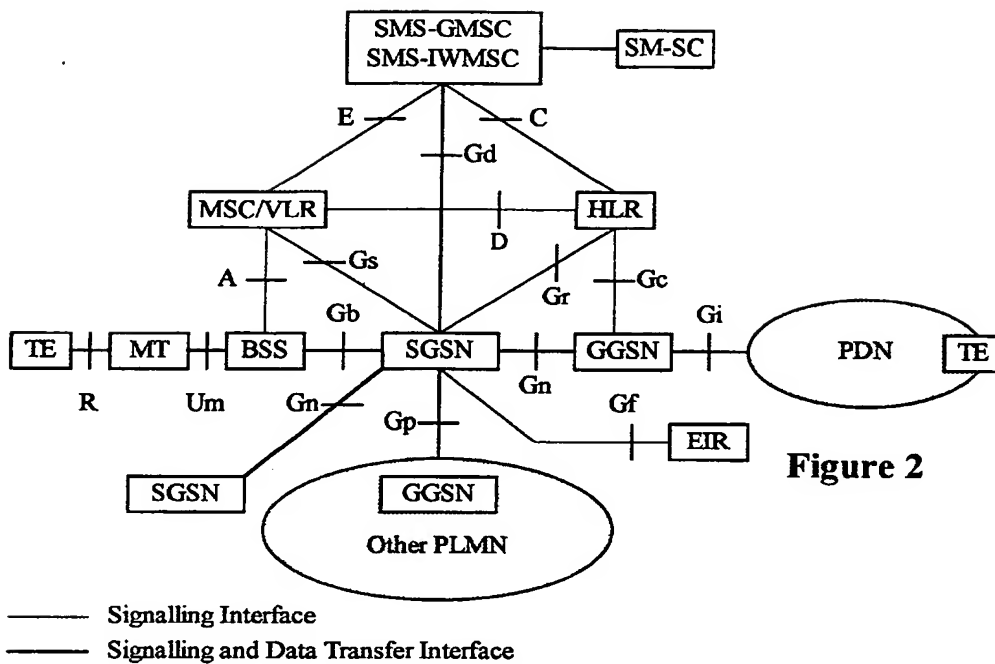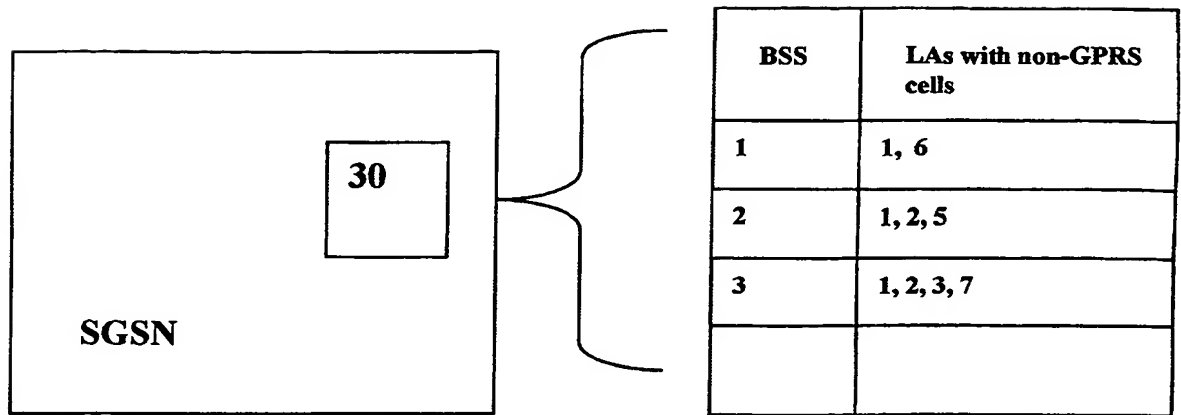

3/4

**Figure 3**

4/4

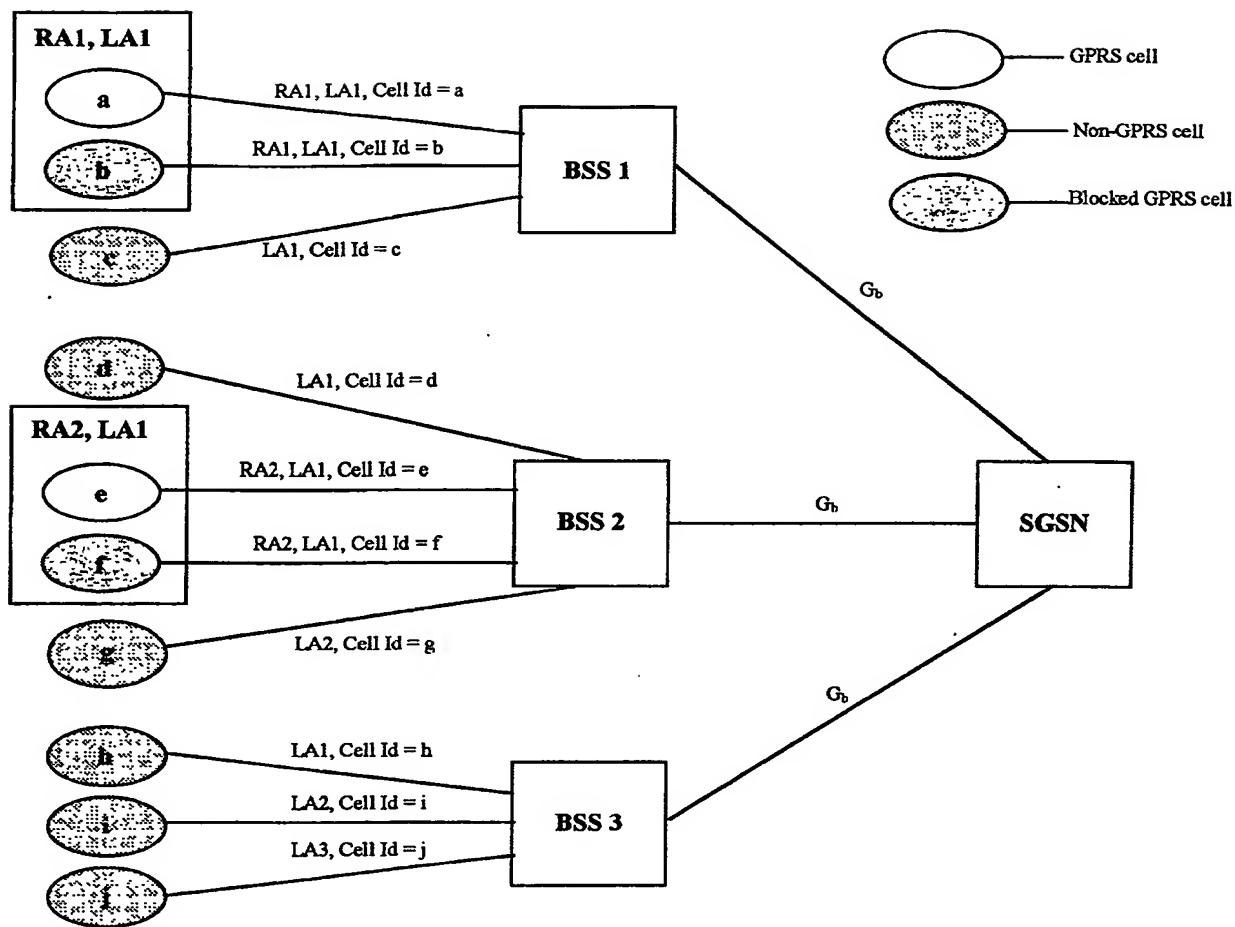


Figure 4